

Smart Interactive Display

MW3575-T-E



Key Features

- Ultra-narrow bezel design, built-in camera & microphone module integration bezel design, minimalist appearance.
- Zero gap Bonding technology, low parallax writing and wider viewing angles.
- 4mm anti-glare toughened glass with high haze OC for clearer display against ambient light interference.
- 4K Ultra HD display ,support full channel 4K UI display.
- Support for Wireless projection.
- Supports dual pens and dual color displays for easy multi-person collaboration.
- Wi-Fi5 support, dual-band 2.4G/5G, AP+STA operating mode.
- Built-in 6-array microphone and 13 million autofocus camera.
- One network support, Android and OPS both on Gigabit network.
- Support network sharing.
- High level welcome application, enriching the live interactive experience with great fun.
- Seven industry themed launcher to meet the needs of multiple scenarios.
- Split screen , parallel tasks and wider scenes.
- New hoverball mode for quick customisation of features.
- Eye protection, lock screen, touch lock and other tools.

Specifications


Model	MW3575-T-E
Display	
Screen Size	75 inches
Backlight	DLED
Pixel Pitch(mm)	0.42975×0.42975mm
Resolution	3840*2160
Brightnes(cd/m ²)	350
Contrast	1200:1
Response Time(ms)	8
Color	1.07B
Viewing Angle	Horizontal 178°, Vertical 178°
View Area(W*H)	1649.664*927.936
Android System	
RAM	8G
ROM	128G
CPU	Quad Core A55
GPU	Mali G52MP2
OS	Android 11.0
Touch	
Sensing Type	Infrared Touch Frame, support 20 touch points
Touch Accuracy (mm)	±2
Response Time (ms)	≤8
Recognizable object (mm)	2
Touchscreen input	Opaque objects (e.g. finger, pen, etc.)
Support System	Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome
Interface	
Input Interface	3*HDMI IN、1*USB 2.0、4*USB 3.0、1*VGA IN、1*DP IN、1*PC AUDIO IN、2*TYPE C
Output Interface	2* TOUCH、1* LINE OUT、1* OPTICAL OUT、1*HDMI OUT
Control Interface	1*RS232、1*RJ45 IN、1*RJ45 OUT
Speaker	
Speaker	2*15W
Channel	2.0
Bluetooth	
Version	5.0
Working Frequency	2.4GHz
Working Distance(m)	0~10
Dual-module WIFI5	

Version	802.11 ac/b/g/n/a/ax
Working Frequency	2.4GHz/5GHz
Working Distance(m)	0~12
Camera	
Pixel	13MP
Qty	1
Microphone	
Pick-up distance	0~8m
Qty	6
General	
Power Supply	AC90V to AC264V
Consumption(W)	≤0.5(Standby)
Operation Temperature	0°C~40 °C
Operating Humidity	10%~80% (No Condensation)
Storage Temperature	-20~60°C
Storage Humidity	10%~90%(No-condensing)
Product Size(W*H*D) (mm)	1706x1021.9x 91.2mm
Packing Size(W*H*D)(mm)	1820x 1240x 200mm
Weight(kg)	Net Weight:56 Gross Weight:66
Accessory	
Standard	1*Touch Pen、1*Wall Mount、1*power cord、1*quick guide、1*Remote control

Appearance

Dimensions

MW3575-T-E

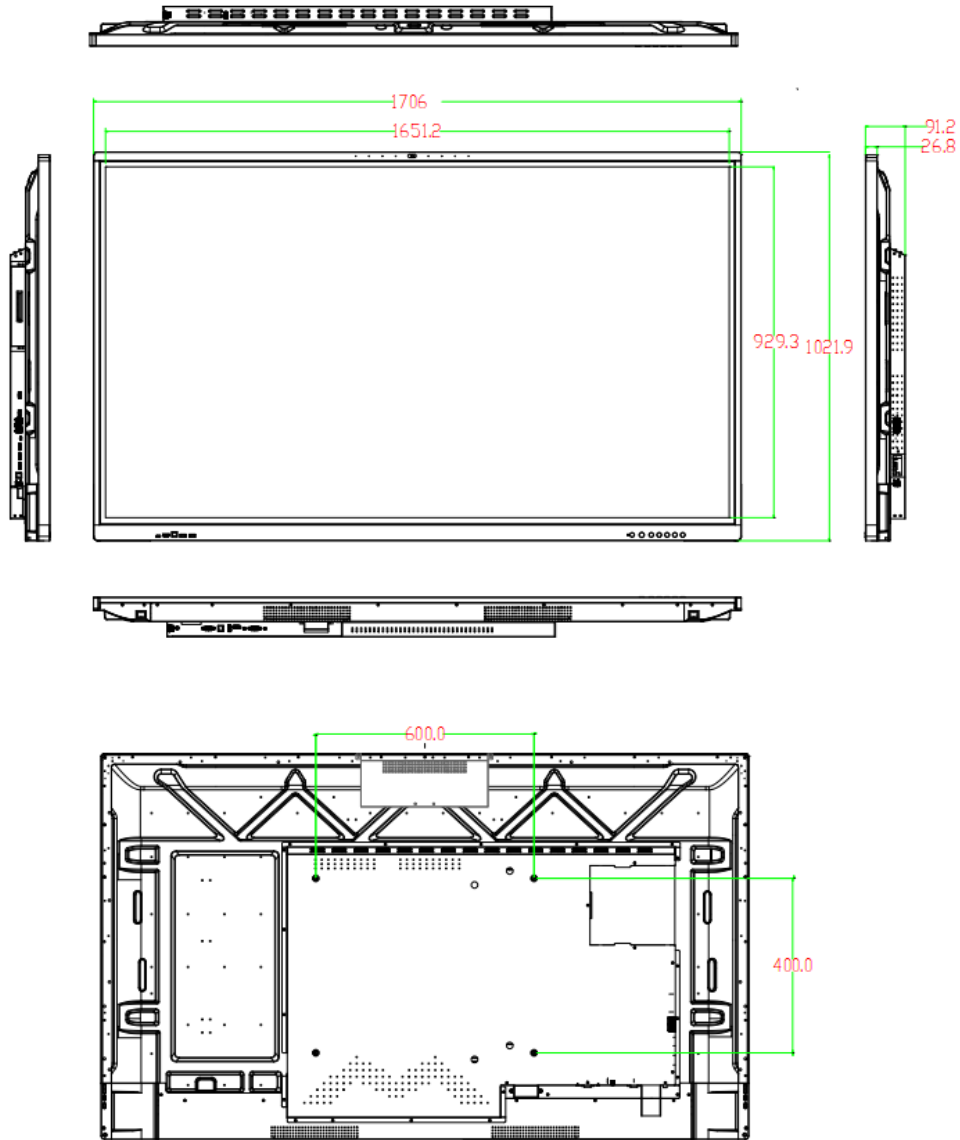

Order Information

Model	Remake
MW3575-T-E	Smart Interactive Display

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.